

WEBPASS TOUCH

Web Based RFID & PIN Controller



- Log Data Real Time **PUSH**
- WeatherProof IP65 rate suitable for both indoor and outdoor environment
- RFID card + Password verification
- Support NFC verification (Mifare Type)
- Standalone with built-in Webserver
- Assign IP Camera for capturing snapshot
- Network Optix Video Management System version available
- Simplified installation with Cat-5e cable

WEBPASS TOUCH

Web Based RFID & PIN Controller

Specifications

GENERAL DATA

Verification Mode	Card/Password
Software Application	SoMac
Card Capacity	20,000 (50,000 extendable)

System Log	1,536
Entry Log	65,535

Time Set/ Time Zone /Group	255/120/255 sets
Holiday	Yes
Remote Control/ Event Handle	Yes/ Yes
Fast Registry	Yes
Anti Passback / Anti Duress	Yes/ Yes
Touch Keypad	Yes
LED Indicators	Blue /Green /Red LED
Support NFC	Yes(Mifare type)

POE Relay controller(CSS-A11)	Optional
POE Relay controller(CSS-A11)	Optional

COMMUNICATION DATA

Communications	TCP/IP, Weigand/ RS485
DIO support	DI:3 / DO:1
Inbuilt Relays (Max. Power Loading)	Door Lock (1A,30VDC)


ELECTRICAL DATA & CONDITIONS

Power Requirement	9~24DC/1A
Power Consumption	560mA 5%
Operation Temperature	0 C~55 C
Operation Humidity	5%~80%RH


PHYSICAL DATA

Dimension	78.5x129x23mm
Weight	122g


STRUCTURE

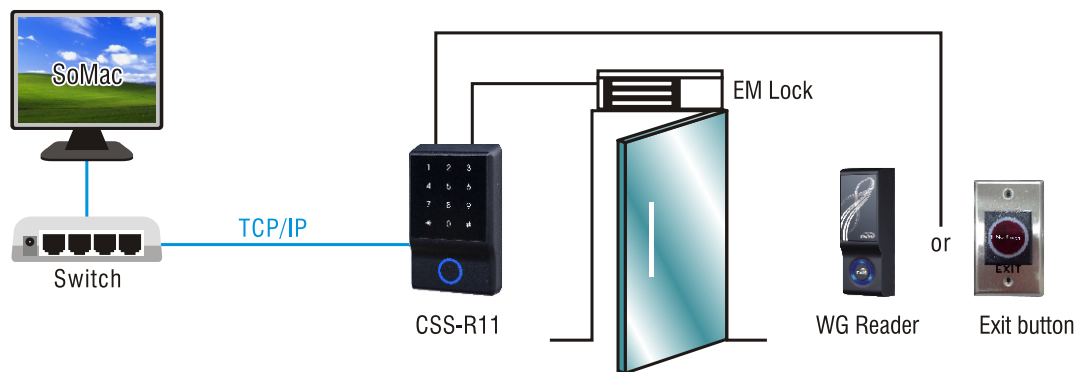

(Standalone + Non POE version RELAY BOX)

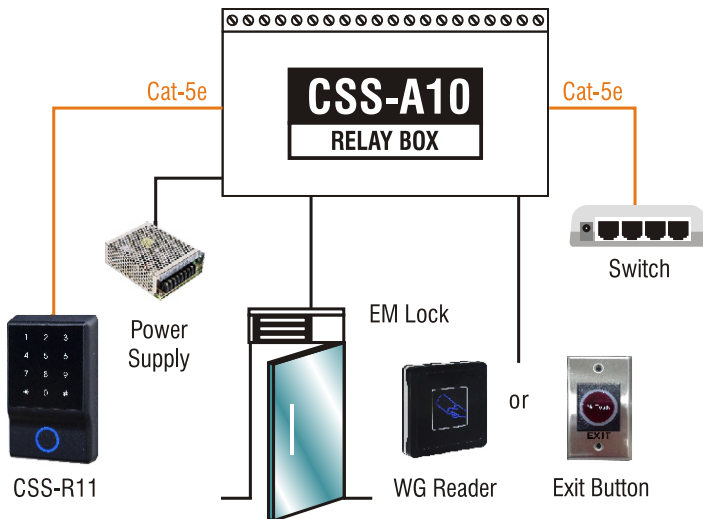

(Standalone + POE version RELAY BOX)

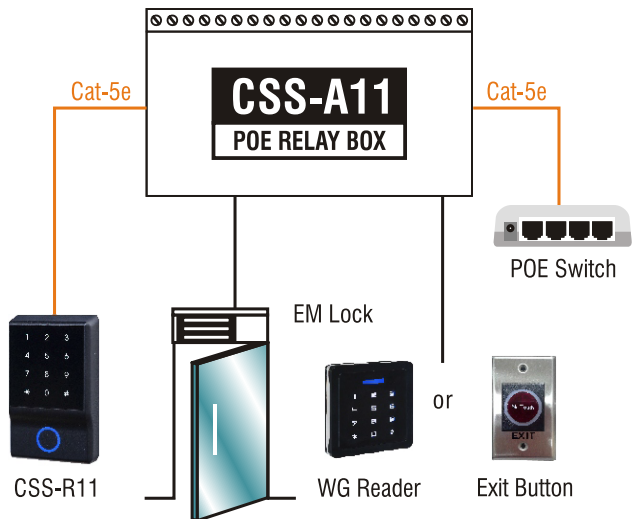

Ordering Information

E: EM125KHz M: Mifare 13.56MHz H: HID 125KHz