

SPECIAL OFFER

Door Access System

Standard Door Accessories

* Include Door Access Package

Include
Installation



\$480
NOW

Fingerprint/Card



✓ 600lbs Electromagnetic Lock



✓ Exit Release Button

Include
Installation



\$580
NOW

Card Access



✓ Emergency Break Glass



✓ Power Supply

Include
Installation



\$780
NOW

Biosense II



✓ 7AH Backup Battery

OPTIONAL ITEMS

Wireless Door Bell

\$50
NOW



Remote WIFI
Controller

\$150
NOW



EM
LOCK

Accessories

GLASS DOOR

WOODEN DOOR

U Bracket

\$20

Fire
Rated
Bracket

\$45

ZL Bracket

\$30

L Bracket

\$20


12 Month Warranty

TEL:83-555-111


DOOR OPEN THROUGH MOBILE APP



WIFI
CONTROLLER

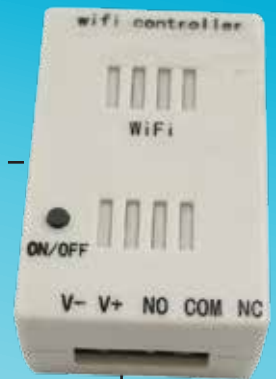

MOBILE

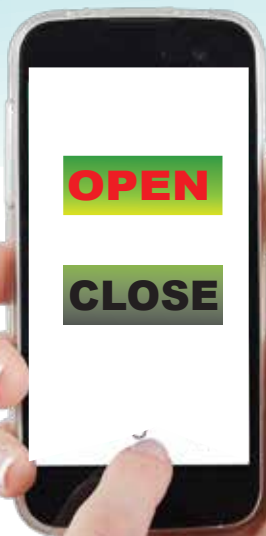

Intelligent Security Access Control Products And Solutions Providers





Model: SMF-F30S

Technical Specification

Unit Size:	86*86*25mm
Color:	Black
Operation Temperature:	0°C-45°C
Operation Humidity:	20-60%
Induction Distance:	3-12cm
Fingerprint Recognition Time:	<1.5s
False Rejection Rate:	<0.01%
Fingerprint Count:	500
Password Count:	2
Power DC10-16v:	100mA
Operation Mode:	Fingerprint, Card, Password, Finger and Password, Finger and Card, Card and Password, Finger Or Card Or Password

Standalone / Wiegand reader Webpass Lite reader

- ★IP-65 Rating Weather Proof
Suitable For outdoor
- ★Multiple Card Types Support
(EM/ Mifare standard)
- ★Cost-Effective solution from
Single door to Multi-door architecture
- ★Easy Wire connection thru RS-485



For high security and access control

WEBPASS LITE

Specification:

- Built-In dry contact , relay box, and I/O for input & output devices (Standalone)
- Cardholder capacity : 1500 (Standalone)
- Log entry capacity : 1500 entries (Standalone)
- Operation Temperature : 0~70°C
- Operation Humidity : 30% ~ 90%
- Power requirement : 9 ~ 24VDC
- Dimension : 120 x 80 x 25 (mm)/ 150 g

Agent Wanted / Welcome OEM, ODM RoHS Compliance ISO 9001:2008 Certified

BioSense-II

Economic WEB Based Attendance Controller



BioSense II Series Option (TA/AC/COMBO)

Model No.	BioSense II - TA	BioSense II - AC	BioSense II - COMBO
Fingerprint Capacity (CHIYU & Suprema Module Option)	500Account(1000FP) 1500Account(3000FP)	500Account(1000FP) 1500Account(3000FP)	500Account(1000FP) 1,500Account(3000FP) 2,500Account(5000FP) 5,000Account(10000FP)
	Suprema:9500Account/9500FP	Suprema:9500Account/9500FP	Suprema:9500Account/9500FP
CardHolder Capacity (Suprema)	500/1500/(20000Account (50000extensible))	500/1500/(20000Account (50000extensible))	20000Account (50000extensible)
Door Controlled	1	1	1
External Reader (Wiegand)	1	1	1
Exit Button	1	1	1
Door Lock	1	1	1
RS485 Communication	1	1	1
TCP Internet Communication	1	1	1

BioSense-II-TA Applications

- Suitable for small to medium offices/compounds/institutions /government
- Additional Interface for RS485 Equipment: Mini Printer/External LCD (4 Characters)
- Relays to connect Exit Button/Lock for door
- Personal Bypass Verification instead Door Bypass Time Zone
- Optional Fingerprint Templates: 1,000/ 2,000/3,000
- Adjustable Still Open Delay Time

BioSense-II TA Key Features

- 4 Default Function Keys: On Work/Off Work/Overtime Start /Overtime End
- Weekday/Holiday 30 sets Ring Time Schedule (WEB or Software)
- Proprietary Time Attendance Software Provide
- Double Clocking Prevention Function
- First In Last Out Records Download and Export (Web and Software)
- On-Line Web User Data Backup/Restore



Control Door Open and Close



Must have 2.4GHz WIFI in order to work



**Remote WIFI
Controller**



**Wireless
Receiver**



**WIRELESS
RECEIVER**

FREQUENCY: 315KHZ



**WIRELESS
REMOTE CONTROL**



WIRELESS DOOR BELL



**WIRELESS DOOR BELL
RECEIVER**



**WIRELESS DOOR BELL
BUTTON**



**WIRELESS DOOR BELL
RECEIVER**



**WIRELESS DOOR BELL
BUTTON**

Power Input 230Vac

**BATTERY
FREE**

WIFI CONTROLLER



Power Input : 12V
Output : NO / COM / NC